

User
Manual

POWER BOX 61
Powered loudspeakers system



Safety instructions

When using this electronic device, basic precautions should always be taken, including the following:

- 1 Read all instructions before using the product.
- 2 Do not use this product near water (e.g., near a bathtub, washbowl, kitchen sink, in a wet basement or near a swimming pool etc).
- 3 Use this device when you are sure that amplifier has a stable base and it is fixed securely.
- 4 This product, in combination with audio source may be capable of producing sound levels that could cause permanent hearing loss. Do not operate for a long period of time at a high volume level or at a level that is uncomfortable. If you experience any hearing loss or ringing in the ears, you should consult with otorhinolaryngologists.
- 5 The product should be located away from heat sources such as radiators, heat vents, or other devices that produce heat.
- 6 The product should be connected to a power supply that is described in the operating instructions or are marked on the product.
- 7 The power supply should be undamaged and never share an outlet or extension cord with other devices. Never leave device plugged into the outlet when it is not being used for a long period of time.
- 8 Care should be taken that objects do not fall into liquids and liquids would not be spilled on the device.
- 9 The product should be serviced by qualified service personnel if:
 - The power supply or the plug has been damaged.
 - Objects have fallen into or liquid has been spilled on the product.
 - The product has been exposed to rain.
 - The product has been dropped or the enclosure damaged.
- 10 There are some areas with high voltage inside, to reduce the risk of electric shock do not remove cover of the microphone receiver or power supply. The cover should be removed by the qualified personnel only.

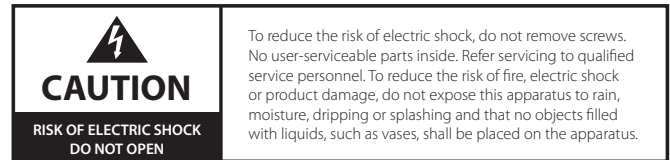


Table of contents

Before you start

Introduction.....	2
Features.....	2

Operation

Rear panel.....	3
Rear panel operation.....	4

Specifications

General specifications.....	5
-----------------------------	---

Before you start


Power Box 61 is a pair of two way loudspeakers consisting of loudspeaker with built-in stereo amplifier and second non powered loudspeaker ready to connect to active by Euroblock connector. High performance 2 x 30 W power amplifier. 6" woofer and 1" tweeter. U-bracket for mounting on the wall or ceiling.

FEATURES

- 2 x 30W audio amplifier inside
- 6" woofer and 1" tweeter
- Volume and tone control
- Stereo RCA audio input
- Stereo 3,5 mm TRS jack audio input

Operation

Rear Panel

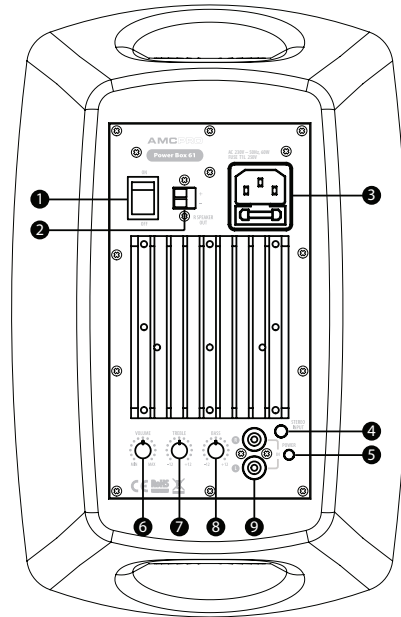

1. Power switch | 2. Right speaker outputs | 3. Power connector | 4. 3,5 mm jack input | 5. Power indicator
6. Volume control | 7. Treble control | 8. Bass control | 9. RCA Input

Operation

Rear panel operation

RCA INPUT

Line level audio input. Connector type - stereo RCA.

3,5 MM JACK INPUT

This is line level stereo audio input. 3,5mm TRS jack connector.

RIGHT SPEAKER OUTPUTS

Output is designed to connect passive Power box 61 loudspeaker to amplifier. Please pay attention to polarity during installation. Minimum loudspeakers load 8Ω.

POWER CONNECTOR

Power connector is designed for main powers connecting to amplifier. This connector is combined with fuse holder and T1L 250V fuse.

VOLUME CONTROL

This rotary potentiometer is designed to adjust volume level of Power box 61 loudspeaker.

TREBLE CONTROL

Treble control allows adjusts high frequency performance in ± 12 dB range. Tone doesn't affect sound when the knobs are set to middle position.

BASS CONTROL

Bass control allows adjusts low frequency performance in ± 12 dB range. Tone doesn't affect sound when the knobs are set to middle position.

POWER SWITCH

Use this switch to power on/off loudspeaker's amplifier.

General Specifications

POWER BOX 61

Frequency response	80 Hz – 20 kHz
Speaker size	6" woofer, 1" tweeter
Rated Power	2 x 30 W
Speakers Sensitivity	88 dB (1W/ 1m)
Maximum SPL NG	95 dB (Pmax / 1 m) at 1000 Hz
Input sensitivity	580 mV

Dispersion	120° (H), 140° (V)
Tone	Bass ± 12 dB, Treble ± 12dB
Material	plastic housing, steel bracket and grill
Dimensions	302 mm x 196 x 193 mm
Weight:	
Active speaker	5 kg
Passive speaker	3.2 kg

The specifications are correct at the time of printing this manual. For improvement purposes, all specifications for this unit, including design and appearance, are subject to change without prior notice.