

HQ 15EN Horn loudspeaker for voice alarm systems





Fix mounting bracket on the flat surface.


AMC 2017 - 005 Revision 2019-02-21 EN54-24:2008 1438-CPR-0550 ISSUE DATE: 17 TYPE B

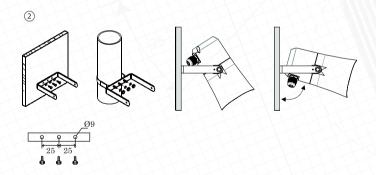

1



Remove mounting bracket from horn loudspeaker.



* with capacitor

Connect speaker to signal line via block terminal. (Select desired power from table)

Other technical data: see on doc. AMC 2017 - 04