



MC 4EN metal ceiling loudspeakers

AMC 2014-001 Revision 2019-02-20



EN54-24:2008
1438-CPR-0412
ISSUE DATE:17
TYPE A




Cut the 155 mm diameter hole in the ceiling.

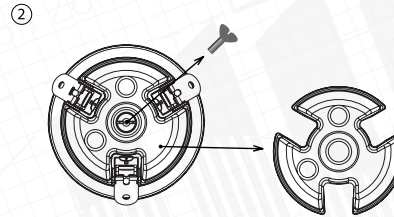

Unscrew bolt and remove dome.

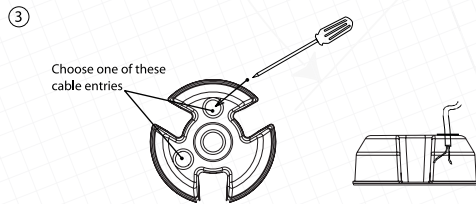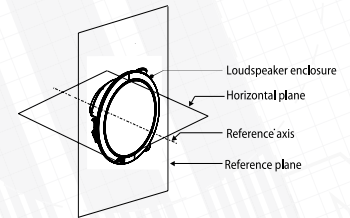


Make the small hole by using awl in the rubber seal and pass through it the cable.

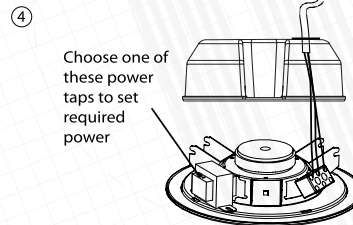


Connect cable with ceramic terminal and set required power output on the line transformer.

MC 4EN Circuit diagram




MC 4EN metal ceiling loudspeakers

⑤

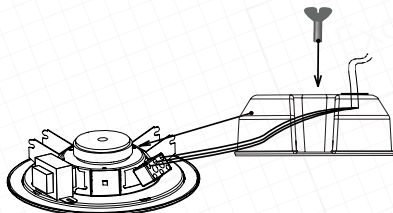


Place the dome on the loudspeaker and fix it with the screw.

⑥




Lift all speaker's mounting clamps.

⑦

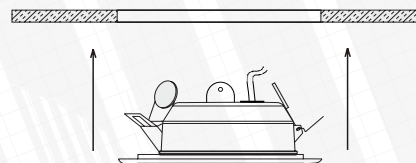

Carefully push loudspeaker into the hole, until the springs fix it.

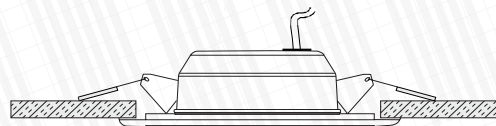

Picture: mounted loudspeaker

Please pay attention: Mount the loudspeaker on the reliable base only.