




W 3/ W 10 wall mount plastic loudspeaker




Fix mounting screws on solid surface (recommended distance between centers of screws holes is 118 mm for both models).



Choose desired transformer power tap and connect it.



Connect audio cable to Phoenix connector located on the rear panel. Power taps for both loudspeaker models are marked near the connector.

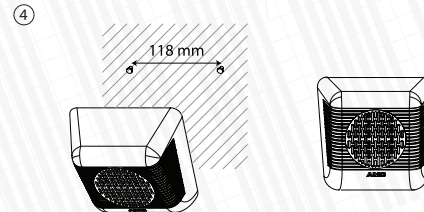

Fix the loudspeaker on the wall.

Please pay attention: Mount loudspeaker on the reliable base only.