

RF 55 Installation manual


① Standard Wall Mount (with the U bracket included in the package)

STEP 1: Remove the M6 and M8 locating inserts from the cabinet as shown


STEP 2: Align the U bracket with the screw holes and use the included M8x25 machine screws to fix it to both side on the cabinet

STEP 3: Insert the included M6x18 machine screws through the curved slots on the U bracket into the screw holes but do not tighten them.

STEP 4: Adjust the U bracket to your desired angle and then tighten the M6x18 screws on both side.

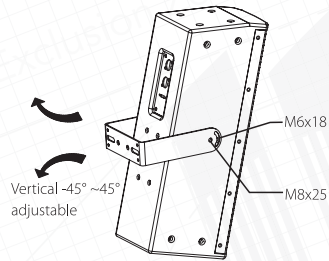

② AMC RF UB Multiangle Bracket (sold separately) Refer to installation manual included with AMC RF UB bracket.

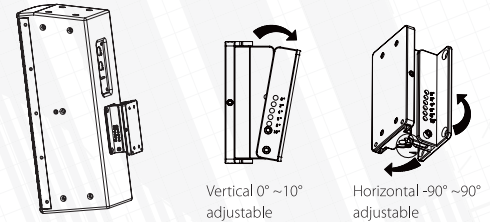

③ AMC RF B55 mounting set (sold separately)

Extension plate:


STEP 1: Remove all the M8 locating inserts (A,B,C&D) from the both upper and lower cabinet as shown

STEP 2: Align the extension plate with the screw holes on the upper cabinet (point A&B) and use the included M8x25 machine screws to fix it to cabinet

STEP 3: Insert another M8x25 machine screw through the curved slots on the extension plate into the screw hole (point D) but do not tighten it

STEP 4: Determine the angle between the two cabinets, (0, 10 and 20 on choice), adjust the lower cabinet until the point C lines up with the hole marked with the angle you choosed. Then fix it with a M8x25 screw

STEP 5: Tighten the screw on point D

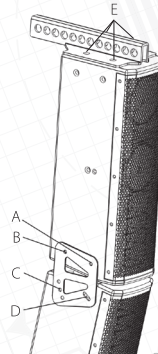

Flying frame:

STEP 1: Remove four M8 locating inserts (E) from the top of the upper cabinet

STEP 2: Align the frame plate with the screw holes on the cabinet and use the included M8 machine screws to fix it

Please pay attention: Mount loudspeaker on the reliable base only.