

HORN LOUDSPEAKERS
HQ Voice Evacuation Plastic Horn Loudspeakers
EN54-24 certified

HQ 15EN robust high SPL outdoor horn loudspeaker certified according to EN54-24 standard


HQ 15EN

HQ 15EN improved quality plastic horn speakers with extremely high SPL and a powerful middle range frequency response. Well suited for indoor and outdoor installation. For voice evacuation and paging systems.

With U-mounting bracket. Conforms EN54-24 standard.




HORIZONTAL / VERTICAL POLAR DIAGRAMS

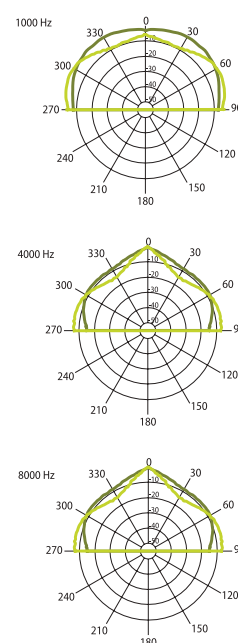


Technical Specifications	HQ 15EN
Rated power	15 W
Transformer power taps	15 W - 7.5 W
Transformer impedance	666 Ω - 1.3 kΩ
Sensitivity	89 dB (1 W / 4 m)
Maximum SPL	100 dB (Pmax / 4 m)
Frequency response	380 Hz - 10 kHz
Dispersion at 500 Hz (1 W / 4 m)	360° (H), 360° (V)
Dispersion at 1000 Hz (1 W / 4 m)	150° (H), 135° (V)
Dispersion at 2000 Hz (1 W / 4 m)	83° (H), 64° (V)
Dispersion at 4000 Hz (1 W / 4 m)	40° (H), 41° (V)
Protection	IP 66
Dimensions	232 mm x 222 mm x 163 mm
Weight	1.42 kg
Material	ABS plastic, U type steel bracket
Colour	White (RAL 9016)



FREQUENCY RESPONSE

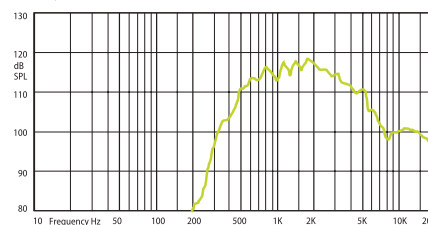

IMPEDANCE

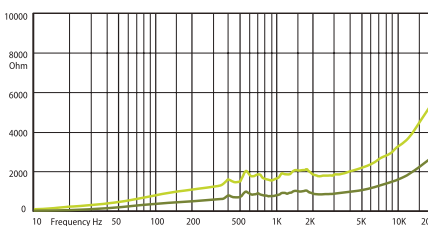

15 W 7.5 W

* Active Equalizer Applied: YES. All SPL tests are performed in a anechoic chamber.
 630 Hz +8 dB 800 Hz +3 dB 5000 Hz +3 dB 6300 Hz +3 dB 8000 Hz +12 dB 10000 Hz +6 dB