

Function description of gooseneck microphone table stand Talk St

INPUT CONNECTOR


Designed to connect gooseneck microphone. 3 pin XLP connector.

HOLD TO TALK BUTTON

Noise free on/off switch without fixation. Hold down button during announcement.

OUTPUT CONNECTOR

Designed to connect Talk St to any mixing amplifier or preamplifier by using standard XLR audio cable.

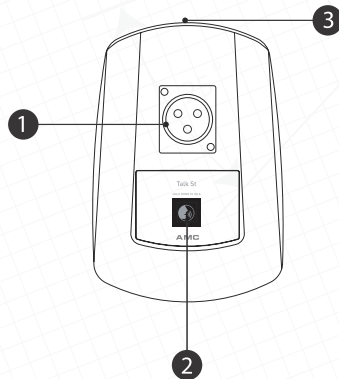

1. Input connector | 2. Hold to talk button | 3. Output connector

Circuit diagram:

