


# EVACW Surface Mount Voice Evacuation Loudspeakers


Metal wall mounted loudspeakers for voice evacuation systems.

## EVACW 5


EVACW 5 metal enclosure loudspeakers with built-in 100V transformer. EVACW speakers are mainly used in voice evacuation systems. Thermal fuse and ceramic wire terminal are integrated to be compliant with EN54-24 standard. Full range speaker has very good medium frequency response to produce clear and intelligible speech. Simple installation on any flat surface, horizontally or vertically.

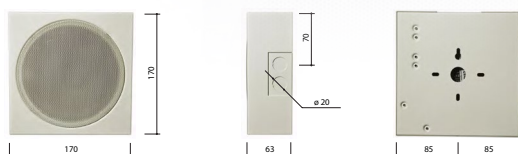


HORIZONTAL / VERTICAL POLAR DIAGRAMS

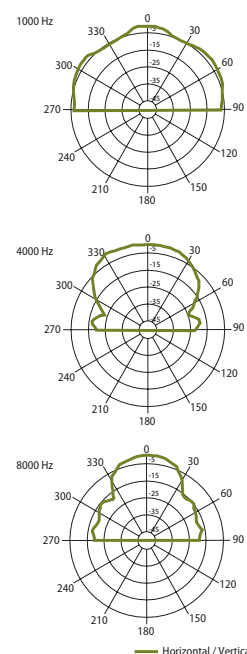

FREQUENCY RESPONSE

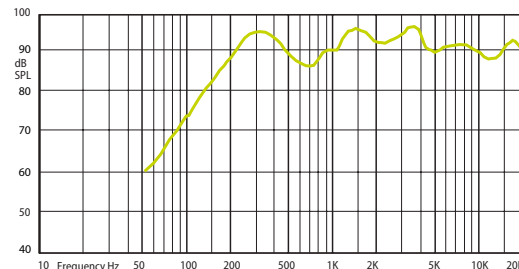

IMPEDANCE

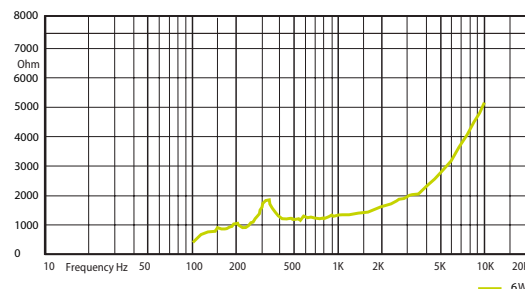

Technical Specifications	EVACW 5
Rated power	6 W (8 Ω)
Transformer power taps	6 W – 4 W – 2 W – 1 W – 0,5 W – 0,25 W
Sensitivity	92 dB (1 W/1 m)
Maximum SPL	100 dB (Pmax/1 m) at 3620 Hz
Frequency response	150 Hz – 20 kHz
Dispersion at 1000 Hz	120° (H), 120° (V)
Driver dimensions	5" (127 mm)
Dimensions	170 mm x 170 mm x 63 mm
Weight	1,4 kg
Material	Steel
Colour	White (RAL 9016)