

04P / 06P Pendant Loudspeaker

①




Drill two 8 mm holes in the ceiling, with a spacing of 60 mm. Insert 8 mm nylon plugs into the holes. If necessary, use different mounting hardware suitable for your ceiling type.

②

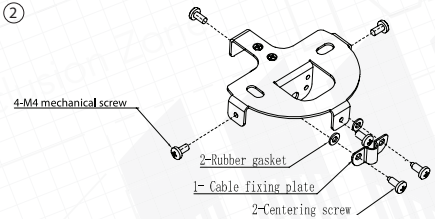


Position the bracket over the drilled holes and secure it to the ceiling. Unscrew one screw of the cable clip to make it easier to pass through the cable.

③

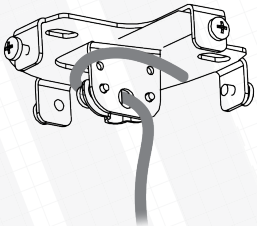


Insert the speaker cable through the ceiling cover and pass it through the hole next to the cable fixing clip. Important note: Insert the cable from the opposite side of the cable clip; otherwise, it will not be possible to mount the ceiling cover correctly. Once the cable is in place, secure the clip by tightening both screws.

④

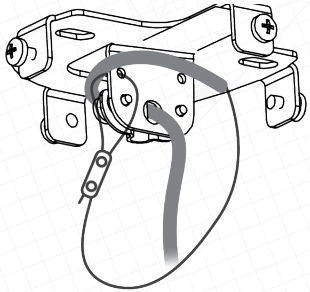


Put on wire rope clamp and pass the safety steel wire rope through one of the holes located next to the cable hole. Make a loop and pass the end of the steel wire rope back through the clamp. Tighten the clamp bolts using a 1.5 mm hex screwdriver.

⑥

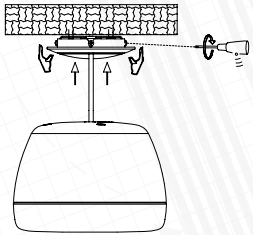

Connect the wires to the audio line and install the ceiling cover by tightening all four screws.

⑥

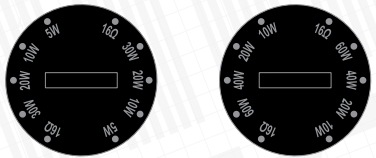

Set the transformer power tap according to your audio system requirements.

Please pay attention: Mount loudspeaker on the reliable base only.